

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 May 2004 (27.05.2004)

PCT

(10) International Publication Number
WO 2004/044335 A1

(51) International Patent Classification⁷: **E02D 3/12**, 27/34

(21) International Application Number:
PCT/TR2003/000083

(22) International Filing Date:
5 November 2003 (05.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002/02517 13 November 2002 (13.11.2002) TR

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant and
(72) Inventor: **ERDEMGİL, E., Mete** [TR/TR]; Re it Galip
Cad. No:92/1, Gaziosmanpa a, 06700 Ankara (TR).

Published:
— with international search report

(74) Agent: **ANKARA PATENT BUREAU LIMITED;**
Bestekar Sok. No : 10, Kavaklıdere, 06680 Ankara (TR).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR REDUCING THE LIQUEFACTION POTENTIAL OF FOUNDATION SOILS

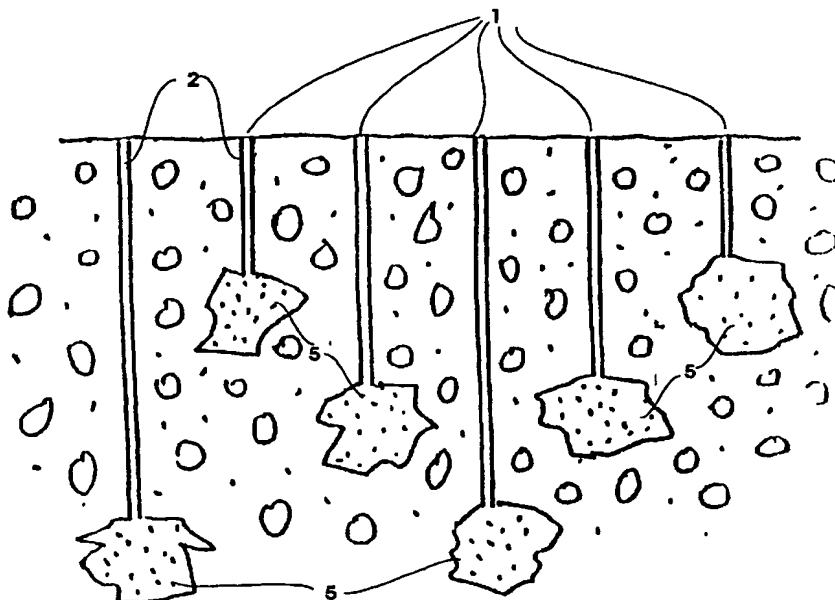

(57) Abstract: The aim of this invention is to present a method in which holes (1) are drilled into the ground for the injection of highly expansive grouts (5), so that the subsoil is void filled and compacted and thus the liquefaction potential under earthquake and vibration forces are reduced.

WO 2004/044335 A1